

STARTER TYPE: 40MT, 42MT

APPLICATION

HEAVY DUTY TRUCK, OFF-ROAD MACHINERY ETC.

Chevrolet/GMC Medium Duty Trucks/Buses/

Chevrolet/GMC Heavy Duty Trucks

Chevrolet/GMC Heavy Duty Trucks/Aluminum Conventional

Dodge Trucks/Medium and Heavy-Duty Trucks

Ford Heavy-Duty Trucks (All models)


Caterpillar V8-175, V8-200, V8-225, 1673, 3176, 3206, 3208, 3406, 3408

Recommended for cranking gasoline engines from 9.8 to 26.2 liters (600 to 1600 cu. in) and diesel engines from 6.6 to 14.8 liters (400 to 900 cu. in)


TECHNICAL DATA

Starter type	40MT-12V	40MT-24V	42MT-12V	42MT-24V
Voltage, V	12	24	12	24
Power, kW	7,6	7,6	8	8
Rotation	CW	CW	CW	CW
Teeth	11/12	11/12	11/12	11/12
Weight, kg	28	28	26,3	26,3

PERFORMANCE

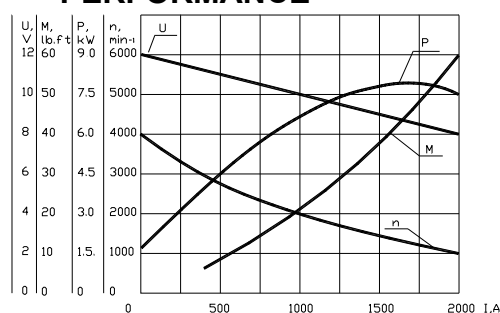

OVERALL DIMENSIONS

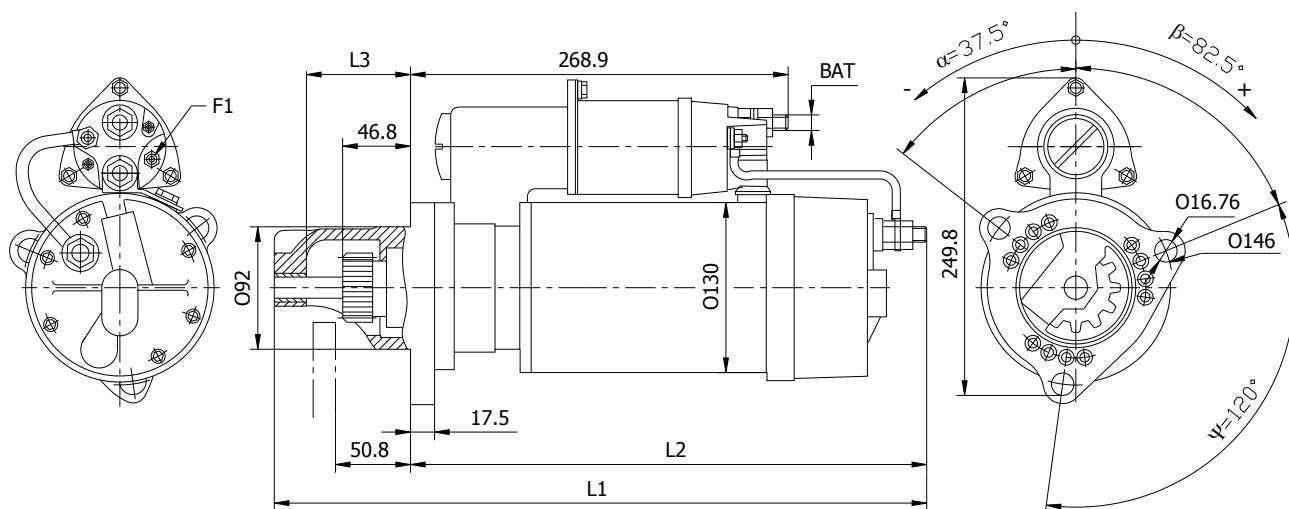

Starter	L1	L2	L3	F1	BAT
40MT	506	403	78	1/4"	1/2"
42MT	468	346,6	76,8	1/4"	1/2"

Produces: Automotive Alternators and Starters; DC electric Motors with permanent magnets and electric magnet excitation; Complete main drives of numerically controlled machine tools, for driving of machines, equipments, manipulators, automation and mechanization systems of technological processes; Portable boring and welding machine.